

SERVICE



LETTER

Service Letter No. 366

January 3, 1962

TO: Distributors, Dealers, Certified Service Centers and Owners

SUBJECT: Nose Gear Clevis

MODELS AFFECTED: PA-24 and PA-24 "250" Comanches - Serial Nos. 24-1 to 24-2609 inclusive

A new high strength nose gear clevis, part number 20859-03, is available to replace the nose gear clevis with which the early models of Comanche aircraft were equipped.

This new clevis may be identified by the letters "H.T." etched on the side of the fitting. We are of the opinion that since this new high strength fitting will provide longer service life, the owners and operators of the affected aircraft should replace the present clevis with this improved one. See sketch on the reverse side of this letter.

NOTE

This clevis, when installed, must be tight in the forging (13 to 40 ft. lbs. torque) and nut must be inboard.

Very truly yours,

PIPER AIRCRAFT CORPORATION


Wes Holmes
Wes Holmes

Service Manager

WH:dlt

(Over)

PIPER AIRCRAFT CORPORATION, LOCK HAVEN, PA., U. S. A.

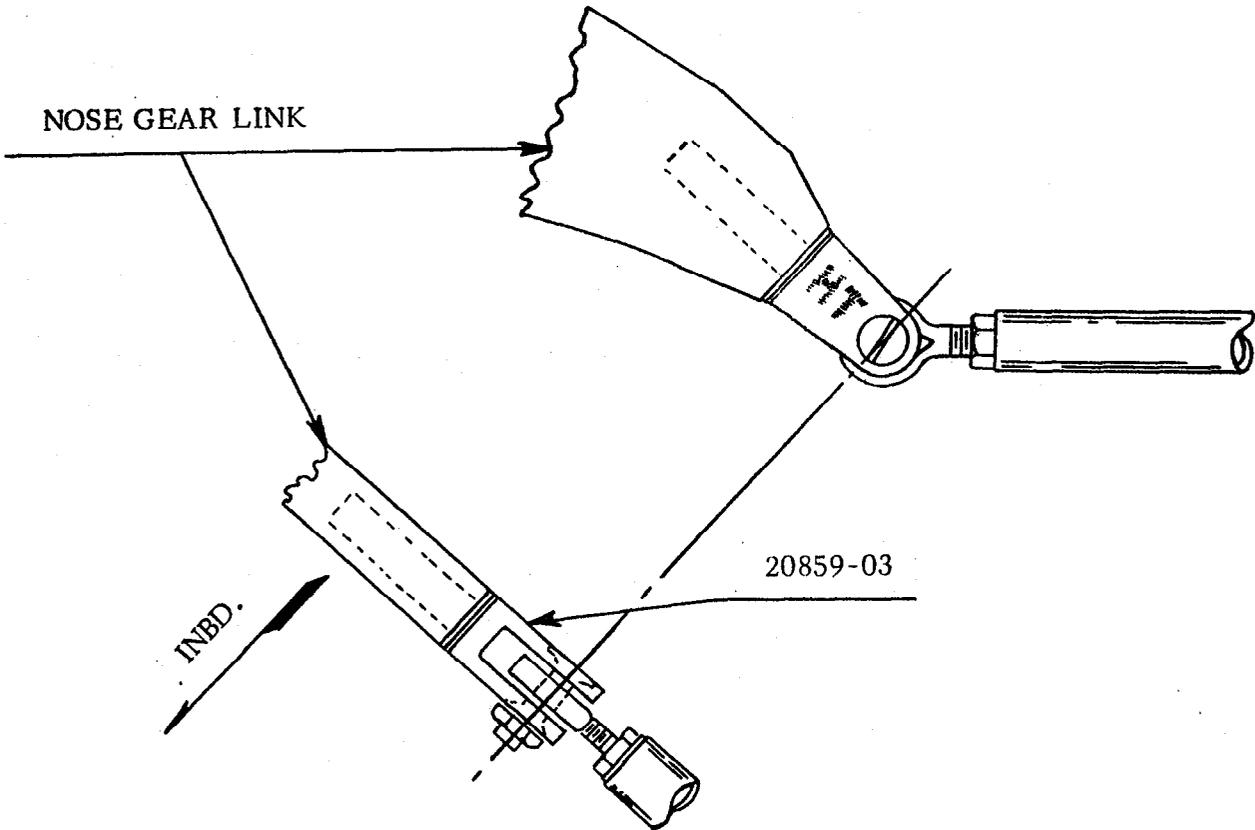

SERVICE LETTER NO. 366